



Complete TECH DS Industry Co., Ltd.

Brief Introduction

Complete Tech Industry specializes in providing oilfield equipments and Industry products for more than 20 years. During these years, We are focusing on R & D, innovation, production and supply metal and plastic parts as well as mould design, mould production.

1. Downhole drilling tools, Sucker rod, Rod Pump, fishing tools and other related products for Oilfield industries.
2. Castings, forgings, stampings and machining fabrications for the truck/automobile, rail, mining and heavy equipment, marine, offshore industries.

We have rich experienced sales and engineers to provide full-range services from the very beginning to the life time of our products.

Affiliate: Xi' An Aikema Marine and Service Co., Ltd.

Complete Tech DS Industry Co., Ltd has rich experience in manufacturing heavy-duty equipment, such as but not limited to cone crushers, rollers, pulley, conveyor belt designed specifically for the harsh conditions of surface and underground mining, crushing, material handling and so on.

Our equipment and components are built with good quality and stable steel, plastic material, our parts last 30% longer than standard industry averages, significantly reducing your replacement cycle.

Higher Throughput: Our new design minimizes blockage and increases processing capacity by up to 20 tons per hour.

From 2025, Our group reorganized the advantages, With our state-of-the-art equipment in our manufacturing facilities, We can always provide one-stop machining and fabrication services to customers for customers as per the sample & drawings and even the technical specification income.

Affiliate: Xi' An Aikema Marine and Service Co., Ltd



SUPERB TECHNOLOGY
QUALITY PRODUCTS
精湛的技术优质的产品



PRODUCT INTRODUCTION

产品介绍

托辊产品 ROLLER RDLER PRODUCT



托辊 Conveyor roller



立辊 Side roller



TD75型托辊 TD75 carrier roller



锥型托辊 Taper roller



摩擦托辊 Friction roller



传动滚筒 Driving pulley



传动滚筒 Drivingpulley



改向滚筒 Bendpulley

ROLLER RDLER PRODUCT

托辊产品



挡辊式调心托辊 Carrier guide self-aligning roller group



串式托辊 String roller group



TD75型槽型托辊组 TD75 through roller group



过渡托辊组 Transition roller group




缓冲托辊组 Impact roller group



摩擦上调托辊组 Camier friction self-aligning roller group



锥型上调心托辊组 Camier taper self-aligning roller group

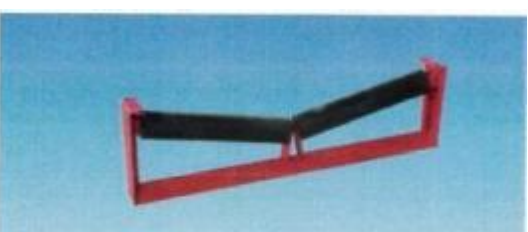

V型托辊组 V-type roller group

ROLLER RDLER PRODUCT

托辊产品



挡辊式调心托辊 Carrier guide self-aligning roller group



串式托辊 String roller group



TD75型槽型托辊组 TD75 through roller group



过渡托辊组 Transition roller group



缓冲托辊组 Impact roller group



摩擦上调托辊组 Camier friction self-aligning roller group



锥型上调心托辊组 Camier taper self-aligning roller group




V型托辊组 V-type roller group

ROLLER

托辊

01 THROUGH ROLLER 35° 槽型托辊35°

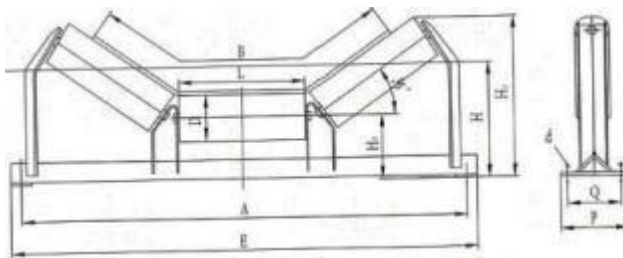


02 FOREARD-TILTED THROUGH ROLLER 35° 槽型前倾托辊35°



带 宽	辊子												槽形托辊(35°)		槽形前倾托辊 (35°)	
B	D	L	轴承	A	E	H1	H	H	P	Q	d	E	重量	图号	重量	图号
													kg		kg	
500	89	200	4G204	740	800	135.5	220	300	170	130	M12	1930	153	DTI01C0111	153	DTI01C0311
650	89	250	4G204	890	950	135.5	235	329	170	130	M12	1926'	16.6	DTI020111	16.6	DTI0200311
800	89	315	4G204	1090	1150	135.5	245	366	170	130	M12	120	21.5	DTI0300111	21.5	DTI0300311
800	108	315	4G204	1090	1150	146	270	385	170	130	M12	120	243	DTI0300121	243	DTI0300321
800	108	315	4G205	1090	1150	146	270	385	170	130	M12	1920	262	DTI0300122	26.1	DTI0300322
1000	108	380	4G205	1290	1350	159	300	437	220	170	M16	123	37.6	DTI0400122	376	DTI0400322
1000	108	380	4G305	1290	1350	159	300	437	220	170	M16	123	38.7	DTI0HC0123	38.7	DTI0HC0323
1000	133	380	4G205	1290	1350	173.5	325	462	220	170	M16	123	435	DTI0400132	43.9	DTI0+4C0332
1000	133	380	4G305	1290	1350	173.5	325	462	220	170	M16	1923	45	DTI04C0133	45	DTI04C0333
1200	108	465	4G205	1540	1600	176	335	503	260	200	M16	123'	50.1	DTI05C0122	50.1	DTI0500322
1200	108	465	4G305	1540	1600	176	335	503	260	200	M16	123	51.2	DTI05C0123	51.2	DTI00500323
1200	108	465	4G306	1540	1600	176	335	503	260	200	M16	123	55.1	DTI05C0124	55.1	DTI05C0324
1200	133	465	4G205	1540	1600	190.5	360	528	260	200	M16	123	575	DTI0500132	575	DTI05C032
1200	133	465	4G305	1540	1600	190.5	360	528	260	200	M16	123	58.6	DTI0500133	58.6	DTI0500333
1200	133	465	4G306	1540	1600	190.5	360	528	260	200	M16	123	63.8	DTI0500134	638	DTI05C0334
1200	159	465	4G205	1540	1600	2075	390	557	260	200	M16	122	65.1	DTI0500142	65.1	DTI05C0342
1200	159	465	4G305	1540	1600	2075	390	557	260	200	M16	1022	66.4	DTI0500143	66.4	DTI0500343
1200	159	465	4G306	1540	1600	2075	390	557	260	200	M16	1922	71.6	DTI05C0144	71.6	DTI0500344
1400	109	530	4G305	1540	1800	184	350	548	280	220	M16	125	56.6	DTI06C0123	56.6	DTI0600323
1400	108	530	4G306	1740	1800	184	350	548	280	220	M16	1025	68.8	DTI06C0124	67.6	DTI06C0324
1400	133	530	4G305	1740	1800	198.5	380	573	280	220	M16	125	64.9	DTI06C00133	73.9	DTI0600333
1400	133	530	4G306	1740	1800	198.5	380	573	280	220	M16	1925	783	DTI06C0134	783	DTI0600334
1400	159	530	4G305	1740	1800	215.5	410	603	280	220	M16	125	74.8	DTI06C0143	74.8	DTI0600343
1400	159	530	4G306	1740	1800	2155	410	603	280	220	M16	1925	86.9	DTI060144	86.9	DTI0600344

*以上数据仅供参考，如有需要请致电本公司

03 THROUGH ROLLER 45° 槽型托辊45°

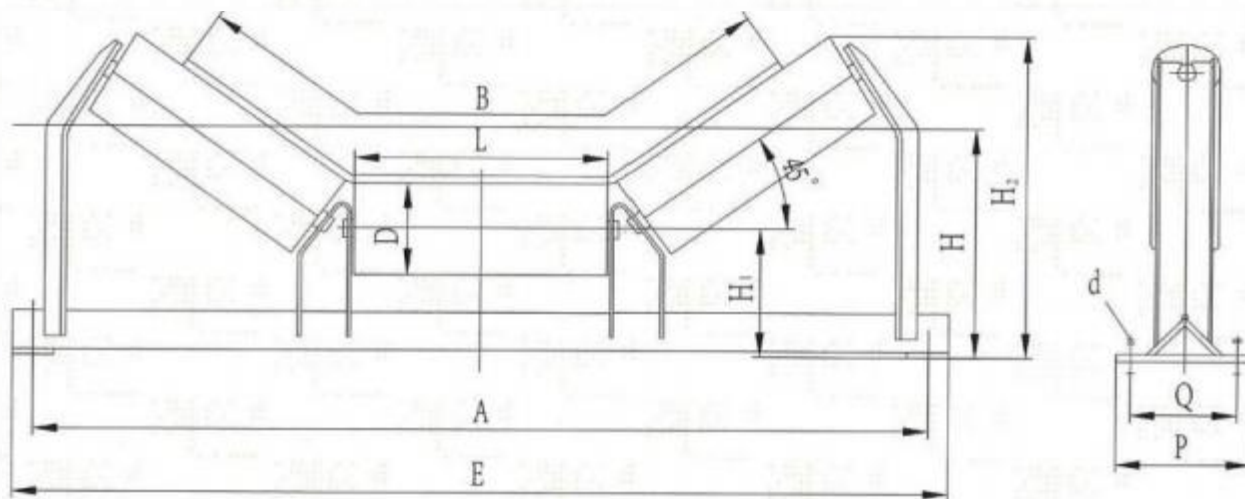


*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽	辊子												
B	D	L	轴承	A	E	H1	H	H2	P	Q	d	重量	图号
												Kg	
500	89	200	4G204	740	800	135.5	220	328	170	130	M12	16.2	DT II 01C0211
650	89	250	4G204	890	950	135.5	235	364	170	130	M12	17.6	DTII02C0211
800	89	315	4G204	1090	1150	135.5	245	410	170	130	M12	22.6	DTI II 03C0211
800	108	315	4G205	1090	1150	146	270	427	170	130	M12	27.3	DTI03C0222
1000	108	380	4G305	1290	1350	159	300	487	220	170	M12	41.6	DTII04C0223
1000	133	380	4G305	1290	1350	173.5	325	515	220	170	M16	48.2	DT II 04C0233
1200	108	465	4G305	1540	1600	176	335	564	260	200	M16	54.6	DT II 05C0223
1200	133	465	4G306	1540	1600	190.5	360	592	260	200	M16	67.5	DT II 05C0243
1200	159	465	4G306	1540	1600	207.5	390	618	260	200	M16	75.3	DT II 05C0244
1400	108	530	4G305	1740	1800	184	350	618	280	220	M16	72.5	DT106C0223
1400	133	530	4G306	1740	1800	198.5	380	646	280	220	M16	82.4	DTI06C0234
1400	159	530	4G306	1740	1800	215.5	410	673	280	220	M16	90.9	DTI06C0244

*以上数据仅供参考，如有需要请致电本公司

04 IMPACT ROLLER 35°

缓冲托辊35°

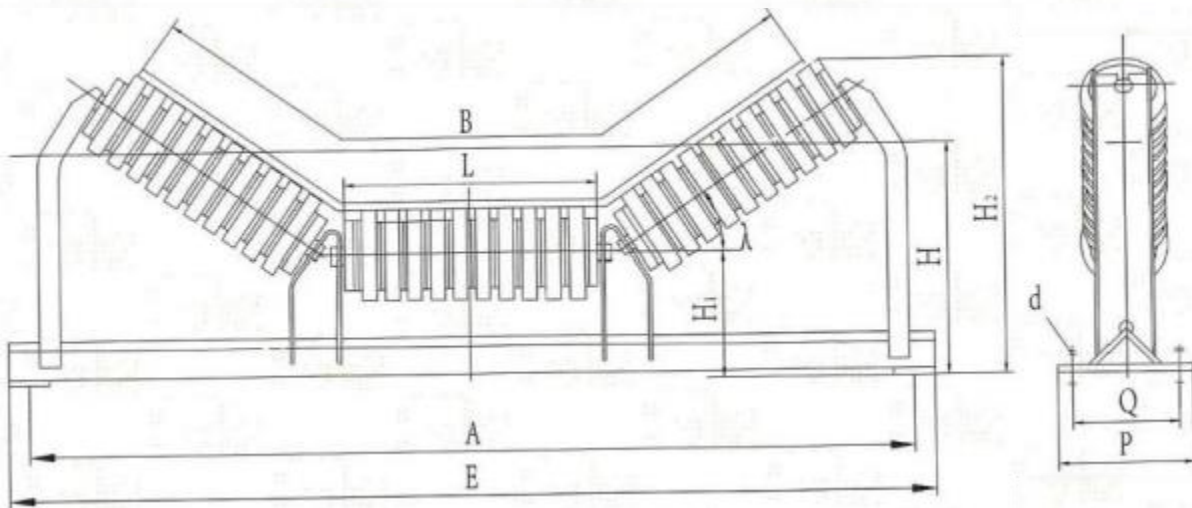


*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽	辊子										λ=35			λ=45		
B	D	L	轴承	A	E	H	H	P	Q	d	H2	重量	图号	H2	重量	图号
												Kg			Kg	
500	89	200	4G204	740	800	135.5	220	170	130	M12	300	175	DTII01C0211	328	18.4	DTII01C0811
650	89	250	4G204	890	950	135.5	235	170	130	M12	329	21.0	DTII02C0211	364	220	DTII0200811
800	89	315	4G204	1090	1150	135.5	245	170	130	M12	366	27.7	DTII0300211	410	28.8	DTII0300811
800	108	315	4G205	1090	1150	146	270	170	130	M12	385	35.5	DTII03C0222	427	36.4	DTII0300822
1000	108	380	4G305	1290	1350	159	300	220	170	M16	437	49.4	DTII0400223	487	529	DTII0400823
1000	133	380	4G306	1290	1350	173.5	325	220	170	M16	462	61.1	DTII04C0233	515	65.3	DTII0400834
1200	108	465	4G305	1540	1600	176	335	260	200	M16	503	66.4	DTII050022	564	70.4	DTII0500823
1200	133	465	4G306	1540	1600	190.5	360	260	200	M16	528	7.1	DTII0500243	592	81.8	DTII0500834
1200	159	465	4G306	1540	1600	207.5	390	260	200	M16	557	88.5	DTII0500244	618	93.9	DTII0500844
1200	159	465	4G308	1540	1600	207.5	390	260	200	M16	557	99.6	DTII0600223	618	104.9	DTII0500846
1400	108	530	4G305	1740	1800	184	350	280	220	M16	548	76.1	DTII0600234	646	89.5	DTII0600823
1400	133	530	4G306	1740	1800	198.5	380	280	220	M16	573	96.2	DTII0600244	673	101.2	DTII0600834
1400	159	530	4G306	1740	1800	215.5	410	280	220	M16	603	107.8	DTII0600711	672	1129	DTII06844
1400	159	530	4G308	1740	1800	215.5	410	280	220	M16	603	111.1	DTII0600711	672	121.4	DTII060844

*以上数据仅供参考，如有需要请致电本公司


05 THROUGH SELF-ALIGNING ROLLER 槽型调心托辊

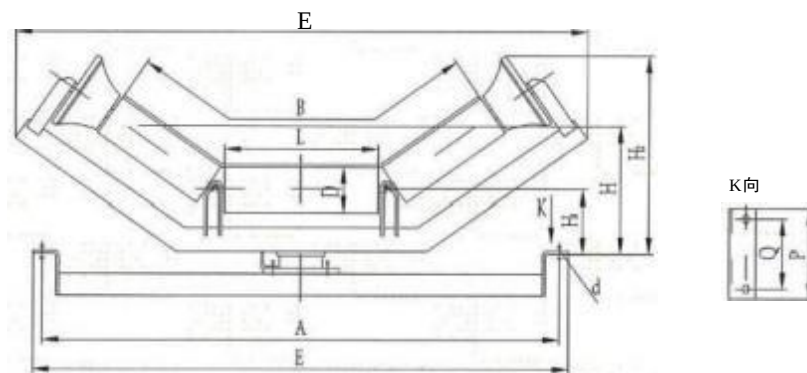

*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽 B	D	L	H	H1	H2	E	A	P	Q	d	轴承型号	重量 kg	图号
500	89	200	220	135.5	346.5	936	740	170	130	M12	4G204	48.4	DTII01C1111
650	89	250	235	135.5	375	1069	890	170	130	M12	4G204	51.7	DTII02C1111
800	89	315	245	135.5	400	1203	1090	170	130	M12	4G204	58.0	DTII03C1111
800	108	315	270	146	4740	1260	1090	170	130	M12	4G205	73.1	DTII03C1122
1000	108	380	300	159	487.5	1456	1290	220	170	M16	4G205	87.2	DTII04C1123
1000	133	380	325	173.5	505	1492	1290	220	170	M16	4G205	107.0	DTII04C1133

05 CAMIER TAPER SELF-ALIGNING ROLLER GROUP 锥形调心托辊

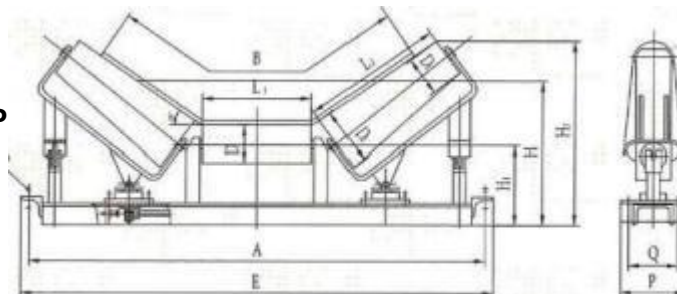

*注：与中间架连接的紧固件包括在本配置图内单位：mm


带宽 B	D	D1	D2	L1	L2	H	H1	H2	E	A	P	Q	d	轴承型号	重量 kg	图号
								3								
800	89	89	133	250	340	245	135.5	380	1150	1090	170	130	M12	4G204	493	DTII03C1211
800	108	89	133	250	340	270	146	400	1150	1090	170	130	M12	4G205	51.9	DTII03C1222
1000	108	108	159	315	415	300	159	450	1350	1290	220	170	M16	4G305	70.0	DTII04C1223
1000	133	108	159	315	415	325	173.5	478	1350	1290	220	170	M16	4G305	729	DTII04C1233
1200	108	108	176	380	500	335	176	521	1600	1540	260	170	M16	4G306	85.6	DTII05C1224
1200	133	108	176	380	500	360	190.5	548	1600	1540	260	200	M16	4G306	87.4	DTII05C1234
1200	159	108	194	380	500	390	207.5	578	1600	1540	260	200	M16	4G306	98.0	DTII05C1244
1400	108	133	176	465	550	350	184	558	1800	1740	280	220	M16	4G305	98.0	DTII06C1223
1400	108	108	176	465	550	350	184	558	1800	1740	280	220	M16	4G306	1020	DTII06C1224
1400	133	108	176	465	550	380	198.5	584	1800	1740	280	220	M16	4G305	99.7	DTII06C1233
1400	133	108	176	465	550	380	198.5	584	1800	1740	280	220	M16	4G306	104.0	DTII06C1234
1400	159	133	194	465	550	410	215.5	615	1800	1740	280	220	M16	4G305	105.0	DTII06C1243
1400	159	133	194	465	550	410	215.5	615	1800	1740	280	220	M16	4G306	110.0	DTII06C1244

*以上数据仅供参考，如有需要请致电本公司



CARRIERFLAT ROLLER

平行上托辊

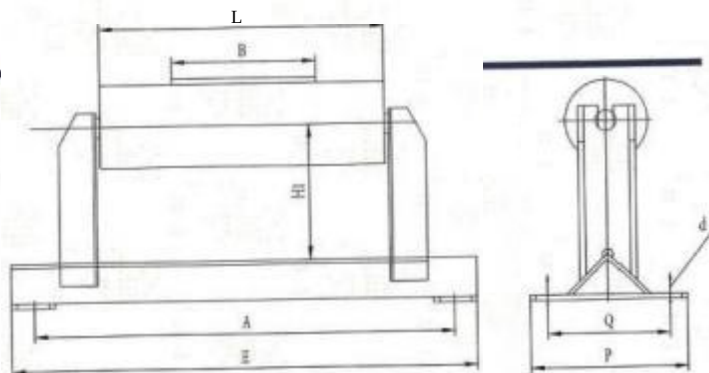

*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽	辊子										
B	D	L	轴承	A	E	H1	P	Q	d	重量	图号
										(kg)	
500	89	600	4G204	740	800	175.5	170	130	M12	11.6	DTI01C1411
650	89	750	4G205	890	950	190.5	170	130	M12	13.7	DTI02C1411
800	89	950	4G305	1090	1150	200.5	170	130	M12	19.0	DTI03C1412
800	108	950	4G305	1090	1150	216	170	130	M12	20.9	DTI03C1423
1000	108	1150	4G305	1290	1350	246	220	170	M16	31.9	DTI04C1423
1000	133	1150	4G305	1290	1350	258.5	220	170	M16	37.2	DTI04C1433
1200	108	1400	4G305	1540	1600	281	260	200	M16	40.9	DTI05C1423
1200	133	1400	4G305	1540	1600	293.5	260	200	M16	52.1	DTI05C1433
1200	159	1400	4G305	1540	1600	310.5	260	200	M16	56.7	DTI05C1443
1400	108	1600	4G305	1740	1800	296	280	220	M16	52.7	DTI06C1423
1400	133	1600	4G305	1740	1800	313.5	280	220	M16	59.6	DTI06C1433
1400	159	1600	4G305	1740	1800	330.6	280	220	M16	63.1	DTI06C1443



CARRIER FRIONFLAT SELF-ALIGNING ROLLER

摩擦上平调心托辊




*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽											
B	D	L	E	H1	A	P	Q	d	轴承型号	重量	图号
										(kg)	
500	89	690	800	175.5	740	170	130	M12	4G204	45.2	DTI01C1311
650	89	840	950	190.5	890	170	130	M12	4G204	48.6	DTI02C1311
800	89	990	1150	200.5	1090	170	130	M12	4G205	55.5	DTI03C1312
1000	108	1226	1350	246.0	1290	220	170	M16	4G306	76.3	DTI04C1312

*以上数据仅供参考，如有需要请致电本公司

RETURNFLAT ROLLER 平行下托辊

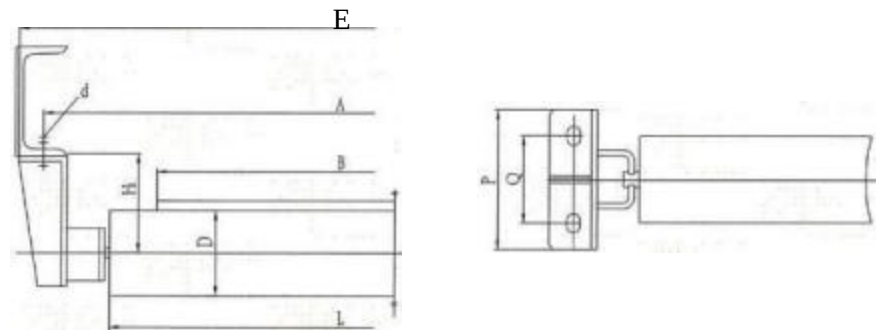


*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽	辊子										
B	D	L	轴承	E	A	H1	P	Q	d	重量	图号
										(kg)	
500	89	600	4G204	792	740	100	145	90	M12	10.4	DT II 01C2111
650	89	750	4G204	942	890	100	145	90	M12	11.8	DT II 02C2111
800	89	950	4G204	1142	1090	144.5	145	90	M12	14.3	DT II 03C2111
800	89	950	4G205	1142	1090	144.5	145	90	M12	15.8	DT II 03C2112
800	108	950	4G204	1142	1090	154	145	90	M12	16.0	DT II 03C2121
800	108	950	4G205	1142	1090	154	145	90	M12	17.4	DTI03C2122
800	108	950	4G305	1142	1090	154	145	90	M12	17.8	DT II 04C2122
1000	108	1150	4G205	1342	1290	164	150	90	M16	19.2	DT II 04C2123
1000	108	1150	4G305	1342	1290	164	150	90	M16	20.8	DT II 04C2132
1000	133	1150	4G205	1342	1290	176.5	150	90	M16	25.7	DTI04C2133
1000	133	1150	4G305	1342	1290	176.5	150	90	M16	26.1	DTI05C2122
1200	108	1400	4G205	1592	1540	174	150	90	M16	20.7	DT II 05C2123
1200	108	1400	4G305	1592	1540	174	150	90	M16	23.6	DTI05C2124
1200	108	1400	4G306	1592	1540	174	150	90	M16	26.6	DT II 05C2132
1200	133	1400	4G205	1592	1540	186.5	150	90	M16	30.0	DT II 05C2133
1200	133	1400	4G305	1592	1540	186.5	150	90	M16	30.3	DT II 05C2134
1200	133	1400	4G306	1592	1540	186.5	150	90	M16	32.1	DT II 05C2142
1200	159	1400	4G205	1592	1540	199.5	150	90	M16	36.6	DT II 05C2143
1200	159	1400	4G305	1592	1540	199.5	150	90	M16	37.0	DT II 05C2144
1200	159	1400	4G306	1592	1540	199.5	150	90	M16	40.5	DTI06C2123
1400	108	1600	4G305	1800	1740	184	150	90	M16	19.8	DT II 06C2124
1400	108	1600	4G306	1800	1740	184	150	90	M16	29.6	DTI II 06C2133
1400	133	1600	4G305	1800	1740	196.5	150	90	M16	33.9	DT II 06C2134
1400	133	1600	4G306	1800	1740	196.5	150	90	M16	36.8	DTI06C2134
1400	159	1600	4G305	1800	1740	209.5	150	90	M16	41.5	DT II 06C2143
1400	159	1600	4G306	1800	1740	209.5	150	90	M16	45.2	DT II 06C2144

*以上数据仅供参考，如有需要请致电本公司

09 V-TYPE ROLLER V 型托辊

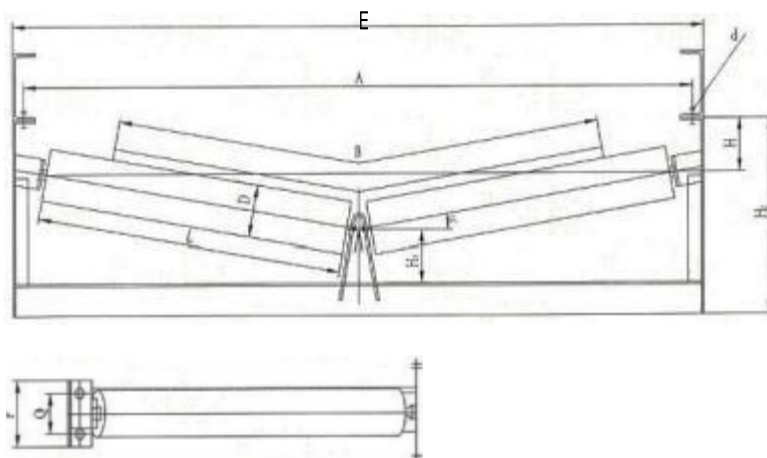

*注：与中间架连接的紧固件包括在本配置图内单位：mm


带宽	辊子											V形托辊		V形前倾托辊	
B	D	L	轴承	E	A	H	H1	H2	P	Q	d	重量 (kg)	图号	重量 (kg)	图号
800	89	465	4G204	1142	1090	100	100	328	145	90	M12	24.4	DTI03C2511	24.4	DTI03C2611
800	108	465	4G204	1142	1090	100	100	338	145	90	M12	26.1	DTI II 03C2521	26.1	DTI03C2621
800	108	465	4G205	1142	1090	100	100	338	145	90	M12	27.7	DTI II 03C2522	27.8	DTI II 03C2622
800	108	465	4G305	1142	1090	100	100	338	145	90	M12	28.4	DTI II 03C2523	28.1	DTI II 03C2623
1000	108	600	4G205	1342	1290	110	100	371	150	90	M16	36.6	DTI04C2522	36.9	DTI II 04C2622
1000	108	600	4G305	1342	1290	110	100	371	150	90	M16	37.3	DTI04C2523	37.7	DTI04C2623
1000	133	600	4G205	1342	1290	110	100	384	150	90	M16	42.5	DTI04C2532	42.8	DTI04C2632
1000	133	600	4G305	1342	1290	110	100	384	150	90	M16	43.3	DTI II 04C2533	43.6	DTI II 04C2633
1200	108	700	4G205	1592	1540	110	100	401	150	90	M16	46.6	DTI05C2522	46.6	DTI II 05C2622
1200	108	700	4G305	1592	1540	120	100	401	150	90	M16	47.4	DTI05C2523	47.4	DTI II 05C2623
1200	133	700	4G205	1592	1540	120	100	414	150	90	M16	53.6	DTI05C2532	51.6	DTI05C2632
1200	133	700	4G305	1592	1540	120	100	414	150	90	M16	54.3	DTI05C2533	52.3	DTI05C2633
1200	159	700	4G205	1592	1540	120	120	447	150	90	M16	62.2	DTI05C2542	62.4	DTI05C2642
1200	159	700	4G305	1592	1540	120	120	447	150	90	M16	63.0	DTI05C2543	63.2	DTI05C2643
1400	108	800	4G305	1800	1740	120	100	420	150	90	M16	53.8	DTI06C2523	54.1	DTI II 06C2623
1400	108	800	4G306	1800	1740	130	100	420	150	90	M16	57.6	DTI06C2524	57.8	DTI06C2624
1400	133	800	4G305	1800	1740	130	100	433	150	90	M16	61.5	DTI06C2533	61.7	DTI06C2633
1400	133	800	4G306	1800	1740	130	100	433	150	90	M16	66.1	DTI06C2534	66.3	DTI06C2634
1400	159	800	4G305	1800	1740	130	120	466	150	90	M16	69.8	DTI II 06C2543	70.1	DTI II 06C2643
1400	159	800	4G306	1800	1740	130	120	466	150	90	M16	74.4	DTI06C2544	74.8	DTI06C2644

*以上数据仅供参考，如有需要请致电本公司

10 RETURN FRICTION SELF-


ALIGNING ROLLER

下调心托辊

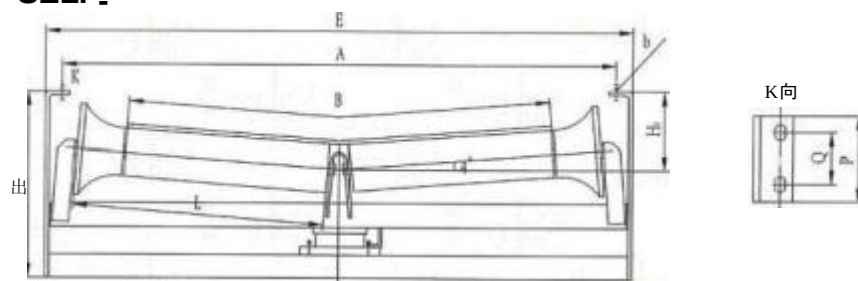

*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽												
B	D	L	H1	H2	E	A	P	Q	d	轴承	重量	图号
											(kg)	
500	89	323	100	334	840	740	130	90	M12	4G204	50.5	DT II 01C2811
650	89	398	100	328	990	890	130	90	M12	4G204	54.4	DT II 02C2811
800	89	473	144.5	367.5	1150	1090	130	90	M12	4G204	60.3	DT II 03C2811
800	108	488	154.5	396	1176	1090	130	90	M12	4G205	73.8	DT II 03C2822
1000	108	590	164	411	1376	1290	130	90	M16	4G305	86.2	DT II 04C2823
1000	133	590	176.5	443.5	1376	1290	130	90	M16	4G305	104.4	DT II 04C2833

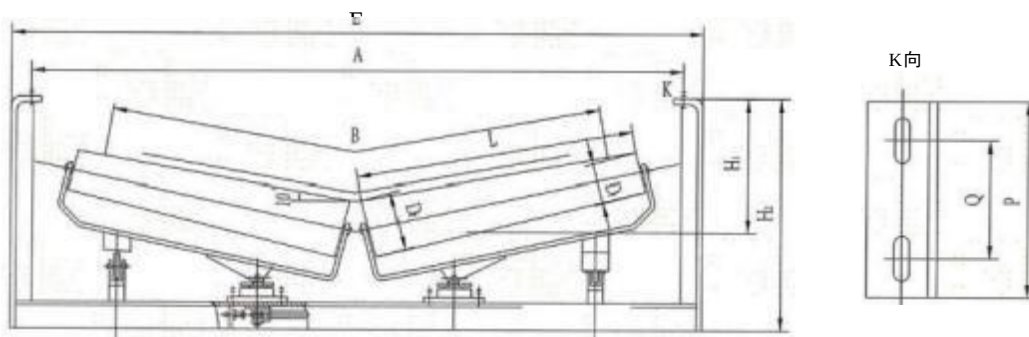


*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽													
B	D1	D2	L	H	H2	E	A	P	Q	d	轴承	重量	图号
												(kg)	
800	108	159	445	217	452	1150	1090	160	90	M12	4G306	60.2	DT II 03C3043
1000	108	176	560	254	504	1350	1290	160	90	M16	4G305	68.4	DT II 04C3053
1200	108	194	680	272	529	1600	1540	180	90	M16	4G306	81.8	DT II 05C3054
1400	108	194	780	291	548	1800	1740	180	90	M16	4G306	111.3	DT II 06C3054

*以上数据仅供参考，如有需要请致电本公司

11 DTII TAIL PULLEY DTII 型改向滚筒

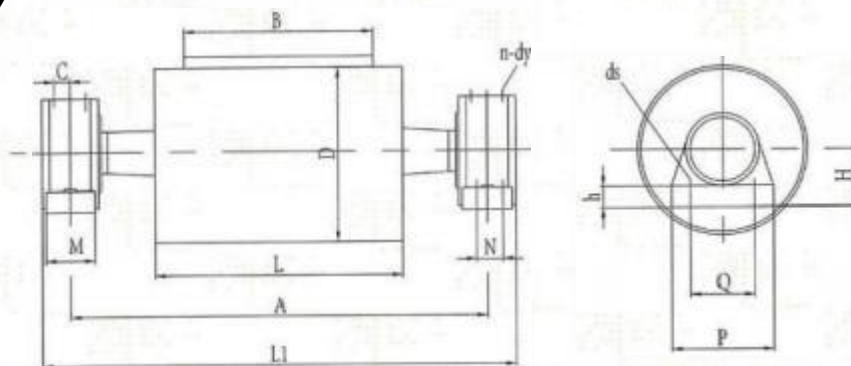

*注：与中间架连接的紧固件包括在本配置图内单位：mm

B	许用合力 KN	D	轴承 型号	A	L	L1	Q	P	H	h	M	N	ds	C	n-dy	光面			胶面								
																转动惯量 kg*mm²	质量 kg	图号	转动惯量 kg*mm²	质量 Kg	图号						
500	9	250	1310	850	600	945	260	320	90	33	70		M16	14	2-M8X	0.5	102	DTII01B1051									
	10	315														1.3	116	DTII01B2051									
		400														3	135	DTII01B3051	3.5	147	DTII01B3052						
	23															1312	953	280	340	100	18	3	166	DTII01B3061	3.5	177	DTII01B3062
	28	500												1316		959	350	410	120	M20	22	5	187	DTII01B4061	6	201	DTII01B4062
	49																				5	245	DTII01B4081	6	260	DTII01B4082	
650	8	250	310	1000	750	1095	260	320	90				M16	14		4-M8X	0.8	117	DTII 02B1051								
		315															1.5	133	DTII02B2051								
	16		1312			1103	280	340	100					18			1.8	166	DTII 02B2061								
		20	400														3	189	DTII 02B3061	3.5	203	DTII 02B3062					
	26	315	01316			1109	350	410	120				M20	22			2	227	DTII 02B2081								
	32	40												3.3			251	DTI 02B3081	3.8	265	DTII02B3082						
	40	500												6.5	278		DTII02B4081	7.8	296	DTII 02B4082							
	46	400	3520			1129	380	460	35				46	80	M24		26	3.5	332	DTII02B3101	4	346	DTII 02B3102				
	59	500																6.5	368	DTII04B4101	7.8	386	DTII04B4102				
	70	630															16.3	422	DTII02B5101	18.5	440	DTII02B5102					
			3524			1050	1189	440	530				155	110			32	20.3	613	DTII 02B5121	21.3	640	DTII 02B5122				

*以上数据仅供参考，如有需要请致电本公司

11

DTII TAILPULLEY

DTII型改向滚筒

B	许用合力KN	D	轴承型号	A	L	L1	Q	P	H	h	M	N	ds	C	nd,	光面			胶面							
																转动惯量kg*m²	质量kg	图号	转动惯量kg*m²	质量Kg	图号					
800	6	250	1310	1250	950	1345	260	320	90	33	70		M16	1418	2-M8X1	0.8	136	DTI03B1051								
	12		1312			1353	280	340	100							1.5	200	DTIIC3H261								
	20	315	1316			1359	350	410	120										M20	22	18	260	DTI03BE2081			
		400																			4.5	288	DTI03K081	4.8	306	DTI03B3082
	32	400	3520	1300		1429	380	460	135	80			26	4M8X1	4.8	360	DTI03K3101	5	387	DTI0SB3102						
	40	500													78	412	DT01B101	98	434	DTI01B102						
	50	630													195	472	DTI03B5101	235	560	DTII03B5102						
	47	400	3524	1300		1439	440	530	155	46		110			M24	32	5.5	509	DTI03K3121	6.3	527	DII03B3122				
	56	500															78	560	DTI03B1121	9.3	582	DTI0SB1122				
	73	630															24.3	690	DTI03B5121	49.5	719	DTIC3B5122				
	90	800															498	780	DTI0396121	573	823	DTI0SF6122				
	100	630	3528	1300		1449	480	570	170	63	120				37	4-M10X1	278	855	DTI03B5141	30.8	883	DTICB5142				
	126	800												54.8			942	DTI03B6141	61.8	976	DTICR6142					
		630	3532	1400		1579	520	640	200	60	200	105		MBO	43		30	1080	DTI035161	33	1108	DTI03B5162				
	170	800															605	1200	DTII03R616	67.5	1243	DTICW6162				
	240	1000														126.5	1413	DTI03B7161	140	1487	DTI03B7162					
250	800	61.8														1469	DTI03B6181	688	1533	DTI0F6182						
330	1000	3536		1601		570	700	220	70	220	120			46	126.5	1675	DTI03B7181	1403	1755	DTI03B7182						
1000	6	250	1310	1450	1150	1545	260	320	90	33	70		M16	1418	2-M8X	1	156	DTI04B1051								
	11		1312			1553	280	340	100							18	221	DTI0HR2061								
	18	315	1316			1559	350	410	120										M20	22	2	296	DTI01R2081			
		400																			5	328	DTI0B3081	6	350	DTI0AB3082
	29	400	3520	1500		1629	380	460	135	46	80		M24	26	4M8X1	5	427	DTI0B101	6	445	DTI0AB3102					
	35	500														115	472	DT0B10	13.3	500	DTI0B4102					
	43	630	3524	1500		1639	440	530	155	46	10		M24	32		23	546	DTI0B5101	265	567	DTI0IB5102					
	45	400													73	567	DTII0IB3121	83	589	DTI0B3122						
		500													9.5	624	DT04B12	11.3	652	DTI01B1122						
	64	630													298	753	DTI04B5121	333	797	DTI0B5122						
	79	800													583	864	DTI04F6121	67	916	DTI01B6122						
	75	500	3528	1500		1649	480	570	170	63	120			37	4MBX1	8.5	804	DTI04B141	98	831	DTI0B1142					
	87	630														325	940	DTI0B5141	36	975	DTI0AB5142					
	110	800														64.3	1042	DTI0B6141	73	1094	DT0IB6142					
	130	1000														131.5	1214	DTI0B7141	1508	1280	DTI0B7142					
	168	800	3532	1600		1579	520	640	200	60	200	105		MBO		43	4-M10X1	10	1180	DTI015161	38.5	1214	DTII0IB5162			
	200	1000																733	1313	DTI0H6161	81.8	1365	DTI01B6162			
	220	800	151.5	1542		DTI0B7161	1683	1607	DTI04B7162																	
	290		3536	1600		1801	570	700	220	70	220	120			74.8	1606		DTI0HB6181	833	1659	DT0B6182					
	387	1000													3540	1650										
	429		1916	720		880	220	80	250	140	M36	65		198.5		2440		DTI0AB7201	2153	2510	DTI0IB7202					
																		2158	2818	DT0AB7221	2325	2884	DTI0IB722			

*以上数据仅供参考，如有需要请致电本公司

11

DTII TAIL PULLEY

DTII 型改向滚筒

B	甥 KN	D		A	L	L1	Q	P	H	h	M	N	C5	C	nd,	光面			胶面					
																转动惯量 kg*m²	质量 kg	图号	转动惯量 kg° m²	质量 Kg	图号			
1200	6	250	1310	1700	1400	1795	260	320	90	33	70		M16	14	2-MBX1	13	181	DTII05B1051						
	11		1312			1803	280	340	100					18		18	255	DTII05B2061						
		315				1809	350	410	120				M20	22		2	341	DTII05B2081						
	17		1316													6	378	DTII05B3081	7	405	DTII05B3082			
	26	400	3520	1879		380	460	135	80		M24	26	4-MBX1				7	556	DTII05B3102					
	30	500															163	572	DTII05B4102					
	37	630															323	659	DTII05B5102					
	38	400															10	659	DTII°5B3122					
	41	500	3524	1889		440	530	55	110		M24	32	4-MBX1				138	731	DTII0SB4122					
	53	630															38	893	DTII°SB5122					
	64	800															795	1032	DTII05B6122					
	70	500															21	925	DTII05B4142					
	90	630	3528	1899		480	570	170	63	120			37	4-M10X1				425	1090	DTII°5B5142				
	100	800																87	1229	DTI' 05B6142				
	134	1000																175.8	1438	DTII°5B7142				
		630																468	1334	DTII0SB5162				
	150	800	3532	2029		520	640	200	60	200	105	MB0	43	4-M10X1				995	1507	DTII0SB6162				
		1000																204.8	1770	DTII0B7162				
		800																1013	1824	DTII°5B8182				
	200	1000	3536															207	2086	DTII05B7182				
	230	800	1900	2156		640	780	240	万	240		140-MB6	60	1				118.3	2309	DTII0586202				
	351												3540						262	2711	DTII05B7202			
	391	1000											3544						283	3068	DTII05B722			
	437												3548						291	3510	DTII05B7242			
1400	17	315	1316	1900	1600	2009	350	410	120	33	70	“	M20	22	2-M8X1	23	356	DTII06B2081						
		400		2079		380	460	135	46	80		M24	26	68		398	DTII06B3081	8	429	DTII06B3082				
	25	500	3520															8	560	DTII06B3102				
		400																185	629	DTII06B4102				
	40	500	3524	2089		440	530	155	46	110		M24	32	4-M8X				115	729	DTII06B3122				
		630																	158	809	DTII06B4122			
	50	800																	428	971	DTII06B5122			
																			893	124	DTII°686122			
	66	500	3528	2199		480	570	170	63	120			37					24	1009	DTII06B4142				
	90	630																48	1197	DTII06B5142				
	94	800																983	1350	DTII0686142				
	100	1000																198	1580	DTII06B7142				
	120	630	2050	2299		520	640	200	60	200	105	MB0	43		4-M10X1				535	1439	DTII0685162			
		800											3532							1138	1628	DTII06B6162		
	150	1000																	234	1910	DTII06B7162			
	186	800	3536	2251		570	700	220	70	220	120		46					115.8	1970	DTII06B6182				
	236	1000																265	2253	DTII06B7182				
	214	800																				135.3	2403	DTII06B6202
	331												3540	2356		640	780	240	万	240	140	MB6	60	
	361		3544	2366		720	880	270	80				65					300	3333	DTII06B722				
	400	1000	3548	2386		750	900	290	90	250			75					3238	3748	DTII06B7242				
	427		3552	2396																				375.5

*以上数据仅供参考，如有需要请致电本公司

DTII型传动滚筒



*注：与中间架连接的紧固件包括在本配置图内单位：mm

B	许用 扭矩 Kg·m ²	许用合 力 KN	D mm	轴承型 号	轴承座图号	光面					胶面		
						转动 惯量 kg·m ²	质量 kg	图号	转动 惯量 kg·m ²	质量 kg	人字形图号	图号	
500	2.7	49	500	1316	DTIIIZ1208 DTIIIZ1208	5	250	DTIIOLA4081	6	264	DTII01A4083Y2	DTII01A4084	
650	3.5	40				630	6.5	280	DTII02A4081	7.8	298	DTII02A4083Y2	DTII02A4084
	4.1						59	500	16.3	324	DTII02A5081	18.5	347
	6.3	80				630	6.5	376	DTII02A4101	7.8	393	DTII02A4103Yz	DTII02A4104
	7.3	40	500	3520	DTIIIZ1210 DTIIIZ1310	16.3	429	DTII02A5101	18.5	451	DTII02A5103Y2	DTII02A5104	
4.1	40	630	7.8			432	DTII03A4101	9.8	453	DTII03A4103Y2	DTII03A4104		
6.0	50	630	195			492	DTII03A5101	23.5	521	DTII03A5103Y2	DTII03A5104		
7.0	80	800						25	782	DTII03A6103Yz	DTII03A6104		
800	12	80	630	3524	DTIIIZ1212 DTIIIZ1312	23.8	752	DTII03A5121	29.5	776	DTII03A5123Yz	DTII03A5124	
						20				58	887	DTII03A6123Y2	DTII03A6124
						2x16	100	630	28.5	844	DTII03A5141	32	920
	20	110	800	3528	DTIIIZ1114 DTIIIZ1214 DTIIIZ1314					32	967	DTII03A5143S	DTII03A5144S
	2x16									66.3	1095	DTII03A6143Yz	DTII03A6144
	32									66.3	1143	DTII03A6143S	DTII03A6144S
	2×23					160				67.5	1253	DTII03A6163Yz	DTII03A6164
	6.0	40:	630	3520	DTIIIZ1210 DTIIIZ1310					26.5	585	DTII04A5103Y2	DTII04A5104
	12	73	630							38.3	857	DTII04A5123Y2	DTII04A5124
		80	800	3524	DTIIIZ1212 DTIIIZ1312					78.8	964	DTII04A6123Y2	DTII04A6124
1000	1000	1000	3528			DTIIIZ1114 DTIIIZ1214 DTIIIZ1314					80.3	1168	DTII04A6143Yz
1000	2x16	110	800	3528	DTIIIZ1114 DTIIIZ1214 DTIIIZ1314					80.3	1216	DTII04A6143S	DTII04A6144S
	20	1000	3528			DTIIIZ1114 DTIIIZ1214 DTIIIZ1314					166.5	1408	DTII04A7143Y2
	2x16								166.5	1456	DTII04A7143S	DTII04A7144S	
	27								81.8	1376	DTII04A6163Y2	DTII04A6164	
	2×22			160	800		3532	DTIIIZ1116 DTIIIZ1216 DTIIIZ1316					81.8
	27					168.3			1617	DTII04A7163Yz	DTII04A7164		
	2×22	170	1000							168.3	1651	DTII04A7163S	DTII04A7164S
	40					83.3			1691	DTII04A6183Y2	DTII04A6184		
	2×35	190	800	3536	DTIIIZ1118 DTIIIZ1218 DTIIIZ1318					83.3	1744	DTII04A6183S	DTII04A6184S
	40							170	1928	DTII04A7183Yz	DTII04A7184		
	2×35	210							170	1981	DTII04A7183S	DTII04A7184S	
	52	330	1000			3540	DTIIIZ1120 DTIIIZ1220 DTIIIZ1320					215.3	2585
	2x42									215.3	2677	DTII04A7203S	DTII04A7204S

*以上数据仅供参考，如有需要请致电本公司

12

DTII DRIVE PULLEY

DTII型传动滚筒

B mm	许用扭 矩 Kg*mm ²	许用 合力 kN	D mm	轴承 型号	轴承座图号	光面					胶面	
						转动 惯 量 kg*mm ²	质 量 别	图 号	转动 惯 量 kg*mm ²	质量 kg	人字形图号	图号
1200	12	52	630	3524	DT1171212 DT1171312				46.5	967	DT1105A5123YZ	DT1105A5124
		80	800						96	1059	DT1105A6123YZ	DT1105A6124
						1000				200	1307	DT1105A7213YZ
	20	85	630	3528	DT1171114 DT1171214 DT1171314				47.3	1156	DT1105A5143YZ	DT1105A5144
	2x16								473	1204	DT1105A5143S	DT1105A5144S
	20								97.8	1297	DT1105A6143YZ	DT1105A6144
	2×16	110	800				97.8	1345	DT1105A6143S	DT1105A6144S		
	20	110	1000	3528	DT1171114 DT1171214 DT1171314				2025	1567	DT1105A7143YZ	DT1105A7144
	2x16								2025	1615	DT1105A7143S	DT1105A7144S
	27								99.5	1520	DT1105A6163YZ	DT1105A6164
	2×22	140	800	3532	DT1171116 DT1171216 DT1171316				99.5	1554	DT1105A7163YZ	DT1105A7164
	27								204.8	1780	DT1105A7163S	DT1105A7164S
	222	160	1000						204.8	1818	DT1105A7163S	DT1105A7164S
	40	180	800	3536	DT1171118 DT11721218 DT1171318				1013	1928	DT1105A6183YZ	DT1105A6184
	2×32								101.3	1981	DT1105A6183S	DT1105A6184S
	40								207	2173	DT1105A7183YZ	DT1105A7184
	232	210	1000	3540	DT1171120 DT1171220 DT1171320				207	2226	DT1105A7183S	DT1105A7184S
	52								1183	2393	DT1105A6203YZ	DT1105A6204
	2×42					230	800				118.3	2484
	52				262			2813	DT1105A7203YZ	DT1105A7204		
	2×42	290						262	2903	DT1105A7203S	DT1105A7204S	
	66	330	1000	3544	DT1171122 DT1171222 DT1171322				283	3234	DT1105A7223YZ	DT1105A7224
	2×50								283	3329	DT1105A7223S	DT1105A7224S
1400	20	100	800	3528	DT1171114 DT1171214 DT1171314				111.8	1417	DT1106A6143YZ	DT1106A6144
	2×16								111.8	1465	DT1106A6143S	DT1106A6144S
	20								2025	1720	DT1106A7143YZ	DT1106A7144
	2x16								2025	1768	DT1106A7143S	DT1106A7144S
	20	130	800	3532	DT1171116 DT1171216 DT1171316				113.8	1530	DT1106A6163YZ	DT1106A6164
	2×16								113.8	1564	DT1106A6163S	DT1106A6164S
	27	160	1000	3532	DT1171116 DT1171216 DT1171316				204.8	1919	DT1106A7163YZ	DT1106A7164
	2×22								204.8	1953	DT1106A7163S	DT1106A7164S
	27	170	800	3536	DT1171118 DT1171218 DT1171318				1158	2004	DT1106A6183YZ	DT1106A6184
	2022								1158	2057	DT1106A6183S	DT1106A6184S
	40		210			1000				236.5	2287	DT1106A7183YZ
	232						236.5	2339	DT1106A7183S	DT1106A7184S		
	52	800		3540	DT1171120 DT1171220 DT1171320				135.3	2553	DT1106A6203YZ	DT1106A6204
	2×42							135.3	2632	DT1106A6203S	DT1106A6204S	
	52		260			1000				2995	2994	DT1106A7203YZ
	2×42						2995	3082	DT1106A7203S	DT1106A7204S		
	66	300	1000	3544	DT1171122 DT1171222 DT1171322				300	3456	DT1106A7223YZ	DT1106A7224
	2×50								300	3551	DT1106A723S	DT1106A7224S

*以上数据仅供参考，如有需要请致电本公司




DTII DRIVE PULLEY

DTII型传动滚筒

B	D	图号	A	L	L1	L2	K	M	N	Q	P	H	h	H1	d	b	ds	C	n-dy		
500		DT1101A4081	850	600	1114	495															
		DT1101A4083YZ																			
		DT1101A4084																			
650	500	DT1102A4081	1000	750	1264	570	140	70		350	410	120	33	74.5	70	20	M20	22	2-M8X1		
		DT1102A4081																			
		DT1102A4084																			
	630	DT1102A4101																			
		DT1102A4103YZ																			
		DT1102A5084																			
	500	DT1102A4101																			
		DT1102A4103Yz																			
		DT1102A4104																			
	630	DT1102A5101			1324	590	170	80		380	460	135		95	90	25					
		DT1102A510 Yz																			
		DT1102A5104																			
800	500	DT1102A4121	1050		1419	615	210	110		440	530	155		116	110	28					
		DT1102A4123Yz																			
		DT1102A4124																			
	630	DT1102A5121			1419	615	210	110		440	530	155		116	110	28	M24				
		DT1102A5123YZ																			
		DT1102A5124																			
800	500	DT1103A4101	1300	950	1624		170	80	-	380	460	135		95	90	25		32	4-M8X1		
		DT1103A4103Yz																			
		DT1103A4104																			
		DT1103A5101																			
		DT1103A5103Yz																			
		DT1103A5104																			
	630	DT1103A6103Yz			740																
		DT1103A6104																			
		DT1103A5121																			
	800	DT1103A5123Yz			1669		210	110	-	440	530	155		116	110	28					
		DT1103A5124																			
		DT1103A6123Yz																			
	630	DT1103A6124			1724	750															
		DT1103A5141																			
		DT1103A5143Yz																			
		DT1103A5144																			
		DT1103A5143S																			
		DT1103A5144S																			
	800	DT1103A6143YZ			1724	750															
		DT1103A6144																			
		DT1103A6143S																			
		DT1103A6144S																			
		DT1103A6163Yz																			
		DT1103A6164																			
800	DT1103A6163S	1400		1839	800																
	DT1103A6164S																				
	DT1103A6163YZ																				
	DT1103A6164S																				

*以上数据仅供参考，如有需要请致电本公司


13 TD75 CARRIER IDLER TD75 型普通棍子

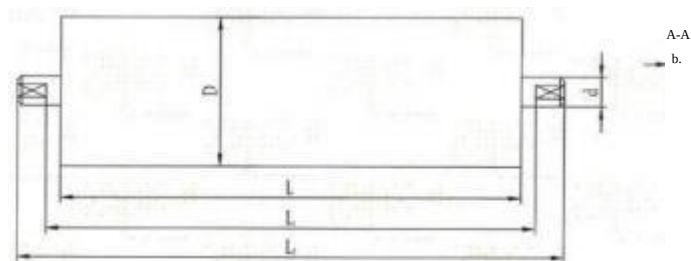

*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽 B	L	L1	L2	D	d	b	轴承型号
B500	190	200	220	089	Ø20	14	4G204
	600	610	640				
B650	240	250	270				
	750	760	790				
B800	305	315	335	108	Ø25	18	4G305
	950	960	990				
B1000	375	385	408				
	1150	1160	1200				
B1200	455	465	488				
	1400	1410	1450				
B1400	525	535	558				
	1600	1610	1650				

14 TD75 IMPACT IDLER TD75 型缓冲棍子

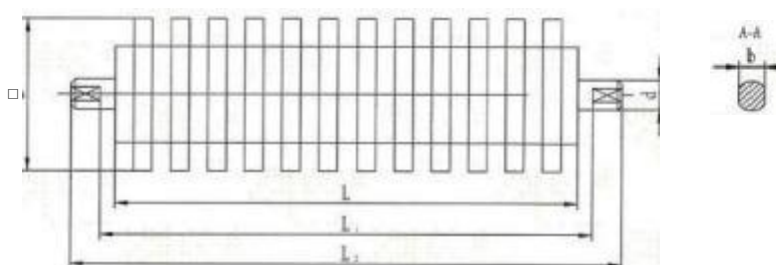

*注：与中间架连接的紧固件包括在本配置图内单位：mm

带宽 B	L	L1	L2	D	d	b	轴承型号
B500	190	200	220	®89	Ø20	14	4G204
B650	240	250	270				
B800	305	315	335				
B1000	375	385	408	Ø108	®25	18	4G305
B1200	455	465	488				
B1400	525	535	558				

*以上数据仅供参考，如有需要请致电本公司

GENERAL CONVEYOR BELT

普通传输带

01 SUMMARIZED 概述

输送带是带式输送机的主要部件，起承载物料的作用，他广泛用于冶金、建材、电力、码头、矿山等行业。

使用输送带作为运输载体和其他运输方式相比具有操作安全、使用方便、维修容易、运费低廉且可实现连续化，缩短运输距离等优点。在一定范围内已成为公路、铁路运输的替代者。

此种输送带适用于一遍条件下输送无特殊腐蚀性常温块状、粒状、粉状物料。

强力层为优质重型帆布或维棉、涤棉帆。

技术指标：执行标准GB/T7984-2001

02 ORDER INSTRUCTIONS 订购说明

输送带订购标明宽度(mm)、 布层数、上覆盖胶厚(mm)+ 下覆盖胶厚(mm)、 长度
强力输送带注明帆布型号：

耐热、耐寒、耐油和乃酸碱输送带应文字注明。

如CC56 输送带，带宽800。6层帆布、上胶厚度4.5mm 下胶厚度1.5mm, 100 米。

表示如下

CC56-B800×64.5+1:5.100 米

计算方式

普通输送带平方数=带宽×(布层数+ $\frac{\text{上胶}+\text{下胶}}{1.5}$)×带长



*以上数据仅供参考，如有需要请致电本公司

03 SPECIFICATION

规格

带宽 (mm)	布层数	覆盖胶厚度	
		工作面	非工作面
400	3-6	4.53.01.5	3.01.5
500	3-6	4.53.01.5	3.01.5
650	3-6	4.53.01.5	3.01.5
800	3-6	6.04.53.01.5	3.01.5
1000	3-8	6.04.53.01.5	4.53.01.5
1200	4-10	6.04.53.0	4.53.01.5
1400	4-10	6.04.53.0	4.53.01.5
1600	4-10	6.04.53.0	4.53.0
1800	5-10	6.04.5	4.53.0
2000	6-12	6.04.5	4.53.0
2200	6-12	6.04.5	4.53.0

胶带纵向拉伸强度规格: 160200250315400500630 N/MM

04 COVERLAYER THE PHYSICAL PROPERTIES

覆盖层物理性能

覆盖层性能级别	代号	拉伸强度 MPa, $\geq$	拉断伸长率% $\geq$	磨耗量mm $\geq$	70 ° cX168h老化后, 拉伸强度和拉断伸长变化率%
强划裂型	H	24.0	450	120	-25~+25
强磨损型	D	18.0	400	100	-25~+25
一般型	L	15.0	350	200	-25~+25

05 INTERLAYER ADHESIONSTRENGTH

层间粘合强度

项目	布层间	覆盖层与带芯间	
		覆盖层厚度 $\leq 1.5\text{mm}$	覆盖层厚度 $> 1.5\text{mm}$
全部试样平均值, N/mm	3.2	2.1	2.7
全部试样最低峰值, N/mm	2.7	1.6	2.2

*以上数据仅供参考, 如有需要请致电本公司

NYLON

CONVEYOR BELT

尼龙输送带

01 FEATURES

特点

带体弹性好、耐冲击
带体粘合强度高、耐屈挠、成槽性好
同涤棉帆布相比，强度高、带体薄、自重轻
耐湿热、耐腐蚀、耐磨损，使用命长



02 USES

用途

适用于中长距离和高载量、高速度、冲击性大、磨损较重的条件下输送物料，如煤炭、矿石、石料或成件物品等。 技术指标：执行标准GB/T7984-2001

带 宽 (mm)	布层数	覆盖胶厚度	
		工作面	非工作面
400	3-4	4. 53. 0	3. 01. 5
500	3-5	4. 53. 0	3. 01. 5
600	3-5	6. 04. 53. 0	3. 01. 5
650	3-5	6. 04. 53. 0	4. 53. 01. 5
800	3-6	6. 04. 53. 0	4. 53. 01. 5
1000	3-7	6. 04. 53. 0	4. 53. 01. 5
1200	4-7	6. 04. 5	4. 53. 0
1400	4-7	6. 04. 5	4. 53. 0
1600	4-7	6. 04. 5	4. 53. 0
1800	4-7	6. 04. 5	4. 53. 0
2000	5-10	6. 04. 5	4. 53. 0
2200	5-10	6. 04. 5	4. 53. 0

03 INTERLAYER ADHESION STRENGTH

层间粘合强度

项 目	布层间	覆盖层与带芯间	
		覆盖层厚度	覆盖层厚度
		≤1. 5mm	>1. 5mm
全部试样平均值, N/mm	3. 2	2. 1	2. 7
全部试样最低峰 值, N/mm	2. 7	1. 6	2. 2

04 COVERLAYER THE PHYSICAL PROPERTIES

覆盖层物理性能

覆盖层性能级别	代号	拉伸强度MPa, $\geq$	拉断伸长率% $\geq$	磨耗量mm $\geq$	70 ° cX168h老化后, 拉伸强度和拉断伸长变化率%
强划裂型	H	24.0	450	120	-20~+25
强磨损型	D	18.0	400	100	-20~+25
一般型	L	15.0	350	200	-20~+25

一般难燃型复合GB/T10822-2003 标准要求

覆盖层拉伸强度MPa $\geq$	14
覆盖层拉断伸长率% $\geq$	480

05 INTERLAYER ADHESION STRENGTH

层间粘合强度

项 目	布层间	覆盖层与带芯间	
		覆盖层厚度	覆盖层厚度
		$\leq 1.5\text{mm}$	$> 1.5\text{mm}$
全部试样平均值, N/mm	4.5	3.2	3.5
全部试样最低峰值, N/mm	3.9	2.4	2.9

06 SAFETY PERFORMANCE

安全性能

K3级	K2级
三个纵向全厚度试样的火焰持续时间的平均值不大于60s且任一个单次结果均无复燃现象, 导静电不大于 $3 \times 10^8 \Omega$	六个纵向全厚度试样的火焰持续时间的合计不大于45s, 任何单个值不大于15s, 均无复燃现象, 导静电不大于 $3 \times 10^8 \Omega$

*以上数据仅供参考, 如有需要请致电本公司

POLYESTER

〔EP〕 CONVEYOR BELT

聚酯 (EP) 输送带

01

概述 SUMMARIZED

聚酯输送带是由多层聚酯帆布和弹性好、强力高、耐磨损性优异的覆盖胶组成。用于输送中小块状，粉状，粒状等物料。适用于中长距离，较高载重和高带速条件下输送物料。



02

分类 CLASSIFICATION

按覆盖胶的性能可分为普通用途型的强划裂型，强磨损型，一般型和耐酸碱型，耐燃型，耐热型。

03

型号 MODEL NUMBER

EP80 EP100 EP125 EP150 EP200 EP250 EP300 EP400

04

规格 SPECIFICATION

带 宽 （mm）	布层数	覆盖胶厚度	
		工作面	非工作面
400	3-4	4. 53. 0	3. 01. 5
500	3-6	4. 53. 0	3. 01. 5
600	3-5	6. 04. 53. 0	3. 01. 5
650	3-5	6. 04. 53. 0	3. 01. 5
800	3-6	6. 04. 53. 0	4. 53. 01. 5
1000	3-7	6. 04. 5	4. 53. 01. 5
1200	4-7	6. 04. 5	4. 53. 01. 5
1400	4-7	6. 04. 5	4. 53. 0
1600	4-7	6. 04. 5	4. 53. 0
1800	5-7	6. 04. 5	4. 53. 0
2000	5-7	6. 04. 5	4. 53. 0
2200	5-7	6. 04. 5	4. 53. 0

普通用途的聚酯输送带符合 GB/T7984-2001

05

COVER THE PHYSIC MECHANICAL FUNCTION

覆盖胶物理机械性能

覆盖层性能级别	拉伸强度 MPa, ≥	拉断伸长率%≥	磨耗量 mm≥	70° cX168h老化后，拉伸强度和拉断伸长变化率%
强划裂型	24. 0	450	120	-25~+25
强磨损型	18. 0	400	100	-25~+25
一般型	15. 0	350	200	-25~+25

*以上数据仅供参考，如有需要请致电

We welcome your inquiry any time and hope to have chances to work with your esteemed company.

Thank you for your time! ! !



Complete TECH DS Industry Co., Ltd.

Affiliate: Xi' An Aikema Marine and Service Co., Ltd.